

• Introduction

Thank you for purchasing the Skutch CK-3 Message-On-Hold Module for the Uniden TRU-6688 expandable telephone. The CK-3 was designed to supply Promotion-On-Hold whenever the base or any of the up to 10 system cordless Uniden cordless phones are placed ON HOLD. The Promotion-On-Hold automatically stops when the any phone on the system picks up the HOLDING call. The CK-3 installs between the telephone wall jack and the Uniden Base phone.

• How it Works

The CK-3 is a voice controlled module. When the phone is “OFF HOOK” and there no audio detected, from either party, for a period of 4 seconds, the CK-3 plays Promotion-On-Hold audio to the far end party. At the same time it disconnects the Uniden base set from the telephone line, and carefully monitors for any audio or noises from the Uniden system. As soon as the phone is taken OFF HOLD, and any noise is detected, the CK-3 will stop the promotion audio and re-connect the call to the Uniden base set. Each line is independent of each other.

• Installation (single telephone cord)


1- Remove the telephone cord from the Uniden base unit from the **TEL LINE 1&2 jack**, and connect it to the CK-3 jack labeled **WALL JACK 1&2**.

2- Using the supplied telephone cord, connect one end to the CK-3 jack labeled **TO UNIDEN LINES 1&2**, and connect the other end to the Uniden base unit phone jack labeled **TEL JACK 1&2**.

3- Connect the audio cord from your audio source, to the **AUDIO IN** jack on the CK-3. For **DIGITAL** units use the cable that comes with the player, not ours. If you are using a CD player, make sure that you connect the audio cord to the **PHONES OUTPUT** and you place the CD player in the **REPEAT** mode. Use the volume control on the audio source to control the volume.

• Installation (Two Mod Cords)

If your phone is installed with two telephone cords, one for line 1 and another for line 2, then you will have to use the enclosed adapter to convert the two separate cords to a single double line cord. Once this is done you can follow the Installation (Single Mod Cord) instructions.

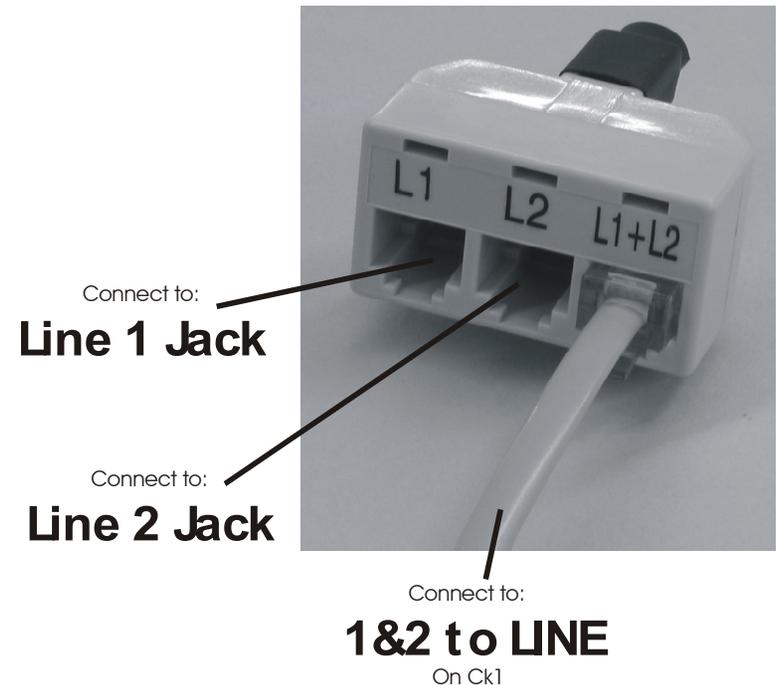

• False Activations

If during a phone conversation, there is a silence gap for a period of over 4 seconds, the CK-4 could false activate. In this case, simply speak or blow into the phone, and the CK-4 will immediately reset. Any noise or speaking will clear the conditions.

- **Technical Support**

If you have any problems getting the unit to work properly feel free to give us a call. Technical Support is available between the hours of 7:30 AM and 4:30 PM Pacific Time, Monday through Friday.

- **ONE YEAR LIMITED WARRANTY**

This SKUTCH PRODUCT is warranted against defects for a period of one (1) year from the date of the original invoice. Within this period, we will repair it without charge for parts and labor. To obtain warranty service the product must be returned, at the customer's expense, to SKUTCH Electronics along with a copy of the original invoice. After the unit has been repaired, SKUTCH will ship the PRODUCT back via UPS GROUND service at our expense. If any other form of return shipment is requested, the customer will pay for 100% of the shipping cost.

This Warranty does not apply if in the sole opinion of SKUTCH Electronics, the PRODUCT has been damaged by lightning or any other Acts of God, or by accident, misuse, neglect, or improper packing, shipping, modification or servicing by other than an authorized SKUTCH Service Center.

EXCEPT AS SPECIFICALLY PROVIDED IN THIS AGREEMENT, THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND IN NO EVENT SHALL SKUTCH ELECTRONICS BE LIABLE FOR LOSS OF PROFITS OR BENEFITS, INDIRECT, SPECIAL, CONSEQUENTIAL OR OTHER SIMILAR DAMAGES ARISING OUT OF ANY BREACH OF THIS WARRANTY OR OTHERWISE.



"Telecommunication Products to solve Telecommunication Problems"

CK-3

Message-On-Hold Module

Version 1.0

